

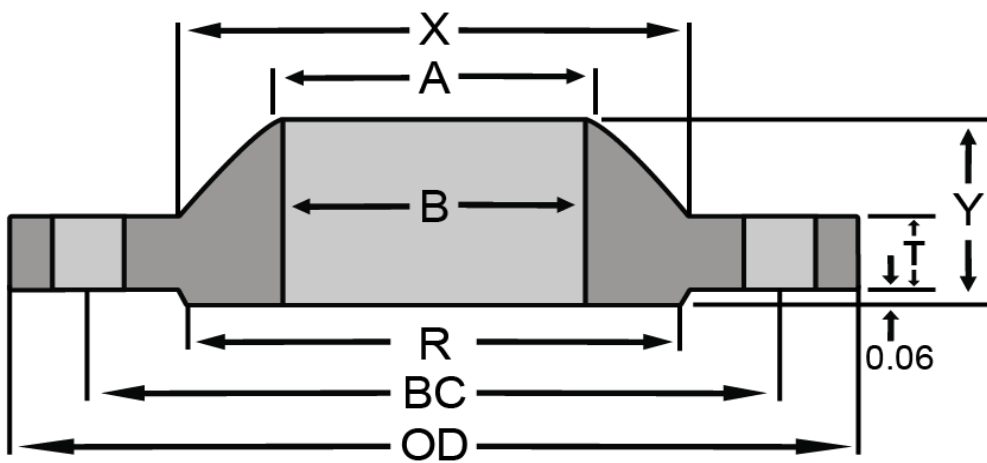


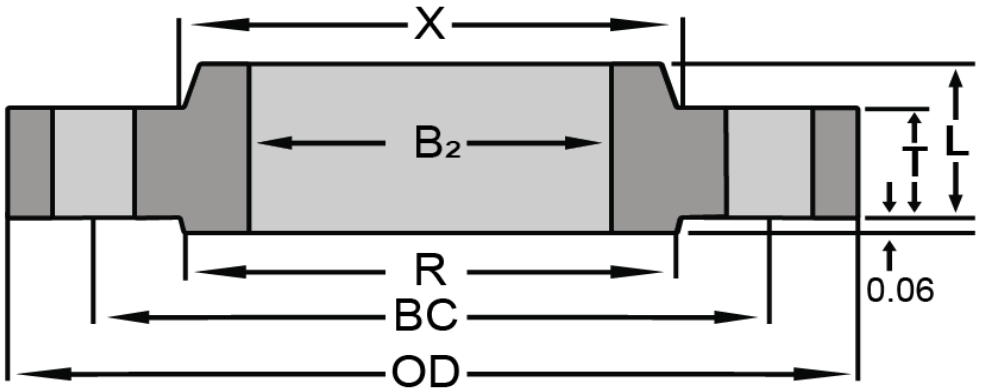

Class 175 Industry Standard

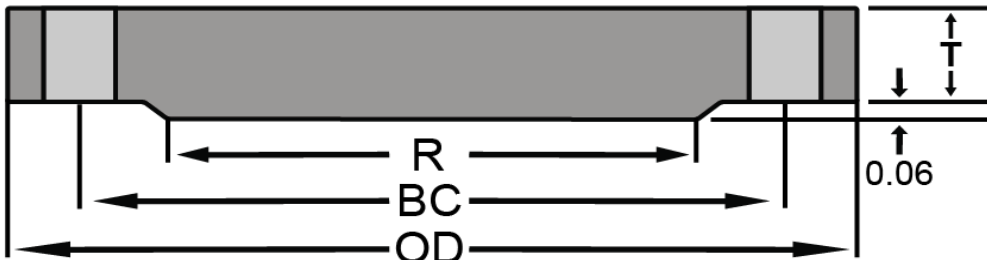

Nominal Size	Outside Diameter (OD)	Thickness (T)			Raised Face Dia. (R)	Hub Diameter (X)	Bore		Length		Hub Diameter at Bevel (A)	Drilling			Approx. Weight (lbs)		
		Weld Neck	Slip-On	Blind			(B)	(B ₂)	Through Hub Weld Neck (Y)	Slip-On (Y ₂)		Bolt Circle (BC)	Dia. of Holes	No. of Holes	Weld Neck	Slip-On	Blind
26	31.50	1.38	1.38	1.78	29.00	27.63	To be specified by purchaser.	26.25	3.38	2.75	To be established by design requirements.	29.88	0.88	28	120	105	405
28	33.50	1.38	1.38	2.00	31.00	29.63		28.25	3.38	2.75		31.88	0.88	28	130	115	490
30	35.75	1.38	1.38	2.13	33.25	31.88		30.25	3.63	2.75		34.13	0.88	36	150	130	590
32	37.75	1.38	1.38	2.25	35.25	33.88		32.25	3.63	2.75		36.13	0.88	36	160	140	700
34	40.25	1.50	1.75	2.38	37.38	35.88		34.25	3.75	3.38		38.38	1.00	36	195	200	840
36	42.25	1.50	1.75	2.50	39.38	37.88		36.25	3.75	3.38		40.38	1.00	36	205	210	970
38	44.25	1.75	2.00	2.63	41.38	39.88		38.25	4.13	3.75		42.38	1.00	36	245	250	1125
40	46.25	1.75	2.00	2.75	43.38	41.88		40.25	4.13	4.00		44.38	1.00	40	255	270	1300
42	49.00	2.00	2.38	2.88	45.75	44.13		42.25	4.50	4.38		46.88	1.13	40	340	365	1500
44	51.00	2.00	2.38	3.00	47.75	46.13		44.25	4.50	4.38		48.88	1.13	40	360	380	1700
46	53.00	2.00	2.38	3.13	49.75	48.13		46.25	4.50	4.63		50.88	1.13	40	375	410	1925
48	55.00	2.25	2.63	3.38	51.75	50.13		48.25	4.88	4.88		52.88	1.13	44	430	460	2225
50	57.00	2.25	2.63	3.38	53.75	52.13		50.25	4.88	4.88		54.88	1.13	44	450	480	2400
52	59.50	2.63	3.00	3.63	56.00	54.25		52.25	5.38	5.38		57.25	1.25	44	560	600	2800
54	61.50	2.63	3.00	3.63	58.00	56.25		54.25	5.38	5.38		59.25	1.25	44	580	620	3000
60	67.50	2.75	3.13	4.00	64.00	62.25		60.25	5.75	5.88		65.25	1.25	48	680	730	4000
66	73.50	3.13	4.00	4.38	70.00	68.50	66.25	6.13	6.88	71.25	1.25	56	830	1000	5175		
72	80.00	3.63	5.00	4.75	76.50	74.50	72.25	6.63	8.00	77.25	1.25	64	1075	1400	6650		

To be specified by purchaser.

To be established by design requirements.

Dimensions are in inches.