

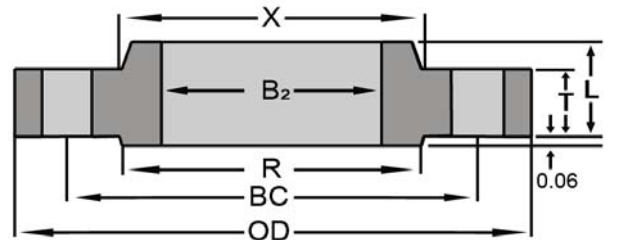


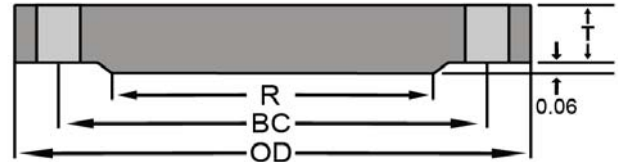

Class 350 Industry Standard

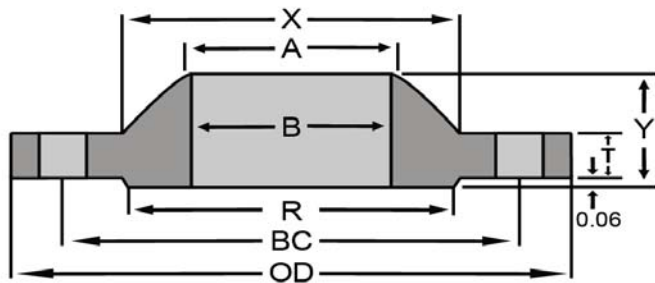

Nominal Size	Outside Diameter (OD)	Thickness (T)			Raised Face Dia. (R)	Hub Diameter (X)	Bore		Length		Drilling			Approx. Weight (lbs)		
		Weld Neck	Slip-On	Blind			(B ₁)	(B ₂)	Through Hub		Bolt Circle (BC)	Dia. of Holes	No. of Holes	Weld Neck	Slip-On	Blind
									Weld Neck (Y)	Slip-On (L)						
26	32.75	2.50	2.50	2.75	29.50	27.88	To be specified by purchaser.	26.25	5.00	4.50	30.63	1.13	28	245	225	580
28	34.75	2.50	2.50	2.88	31.50	29.88		28.25	5.00	4.50	32.63	1.13	28	260	250	750
30	37.00	2.63	2.63	3.00	33.75	32.13		30.25	5.25	4.75	34.88	1.13	32	305	295	890
32	39.00	2.75	2.75	3.25	35.75	34.13		32.35	5.50	5.00	36.88	1.13	36	340	325	1050
34	41.00	2.88	2.88	3.38	37.75	36.13		34.25	5.75	5.13	38.88	1.13	40	375	355	1225
36	43.75	3.13	3.13	3.63	40.25	38.50		36.25	6.13	5.63	41.50	1.25	40	480	465	1500
38	45.75	3.13	3.13	3.75	42.25	40.50		38.25	6.13	5.63	43.50	1.25	40	510	490	1700
40	47.75	3.25	3.25	4.00	44.25	42.50		40.25	6.25	5.88	45.50	1.25	44	540	530	1975
42	50.00	3.50	3.50	4.13	46.50	44.75		42.25	6.50	6.13	47.75	1.25	48	640	620	2225
44	52.75	3.75	3.75	4.38	48.88	46.75		44.25	6.75	6.75	50.25	1.38	44	760	760	2625
46	54.75	4.25	4.25	4.75	50.88	48.75		46.25	7.25	7.25	52.25	1.38	48	880	880	2950
48	56.75	4.25	4.25	4.75	52.88	50.75		48.25	7.25	7.25	54.25	1.38	48	920	920	3300
52	61.50	4.25	-	-	57.25	55.00		52.25	7.50	-	58.75	1.50	52	1075	-	-
54	63.50	4.50	4.75	-	59.25	57.00		54.25	7.75	8.25	60.75	1.50	52	1200	1150	-
60	69.50	4.50	5.00	-	65.25	63.00		60.25	8.00	8.50	66.75	1.50	60	1325	1450	-
66	77.00	4.00	-	-	72.38	70.00		66.25	8.50	-	74.00	1.63	60	1675	-	-
72	83.00	4.00	-	-	78.38	76.00		72.25	9.00	-	80.00	1.63	72	1850	-	-

To be specified by purchaser.

Dimensions are in inches.