



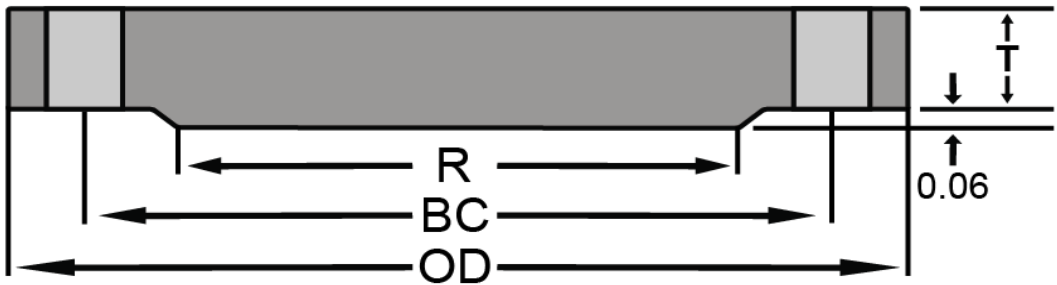

Class 75 Industry Standard
Weld Neck and Matching Blind


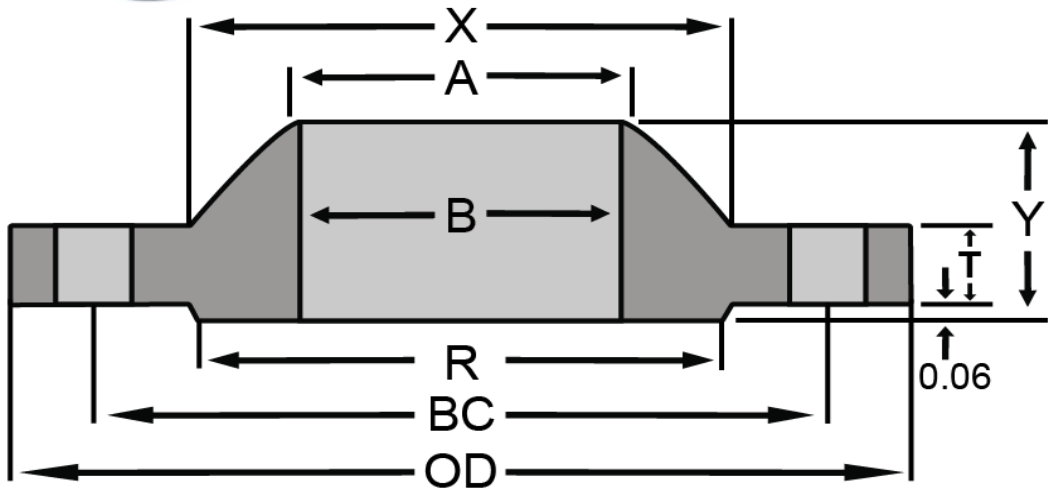


Nominal Size	Outside Diameter (OD)	Thickness (T)		Raised Face Dia. (R)	Hub Diameter (X)	Bore (B)	Length Through Hub (Y)	Hub Diameter at Bevel (A)	Drilling			Approx. Weight (lbs)	
		Weld Neck	Blind						Bolt Circle (BC)	Dia. of Holes	No. of Holes	Weld Neck	Blind
26	31.50	1.15	1.25	28.63	27.13		3.00		29.63	1.00	32	98	265
28	33.50	1.25	1.25	30.63	29.13		3.00		31.63	1.00	36	105	300
30	35.50	1.25	1.38	32.63	31.13		3.00		33.63	1.00	36	110	370
32	38.25	1.25	1.50	35.00	33.38		3.25		36.13	1.13	36	140	470
34	40.25	1.25	1.50	37.00	35.38		3.25		38.13	1.13	40	150	520
36	42.25	1.25	1.63	39.00	37.38		3.25		40.13	1.13	40	160	620
42	49.00	1.25	1.88	45.50	43.75		3.50		46.75	1.25	48	210	970
48	55.00	1.25	2.13	51.50	49.75		3.75		52.75	1.25	52	240	1375
54	61.25	1.38	2.38	57.75	56.00		4.00		59.00	1.25	64	310	1925
60	67.25	1.63	2.63	63.75	62.00		4.38		65.00	1.25	72	400	2575
66	74.00	1.88	2.88	70.13	68.00		4.88		71.50	1.38	72	560	3400
72	80.00	2.25	3.13	76.13	74.00		5.25		77.50	1.38	80	700	4350

To be specified by purchaser.

To be established by design requirements.

Class 75 Industry Standard
Slip On and Matching Blind

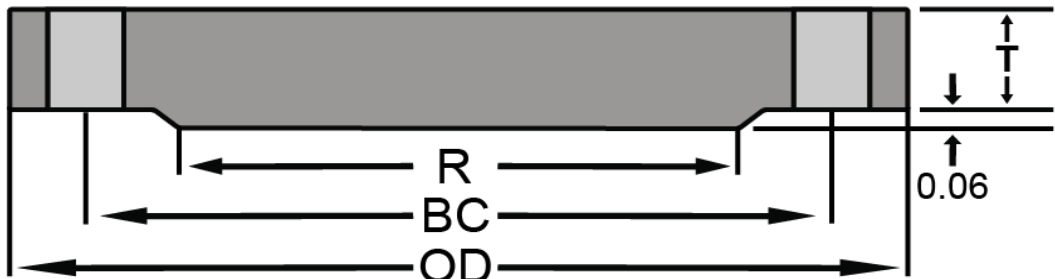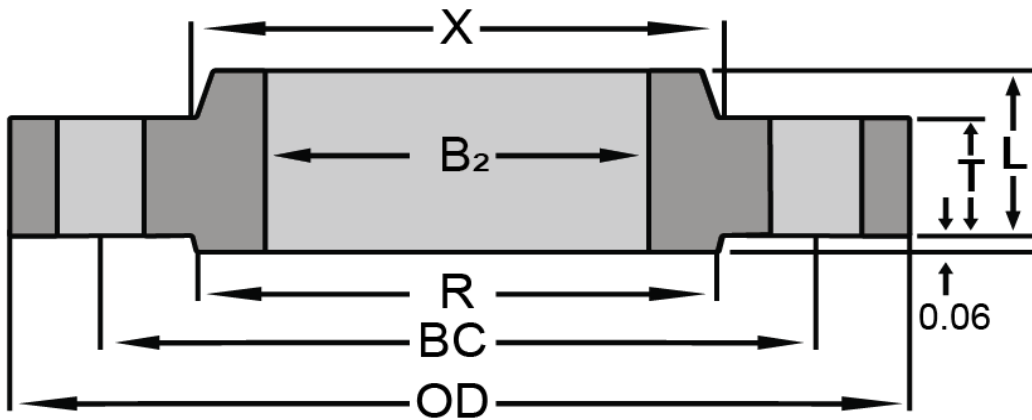

Nominal Size	Outside Diameter (OD)	Thickness (T)		Raised Face Dia. (R)	Hub Diameter (X)	Bore (B)	Length Through Hub (Y)	Bolt Circle (BC)	Drilling			Approx. Weight (lbs)	
		Slip-On	Blind						Dia. of Holes	No. of Holes		Slip-On	Blind
26	33.00	1.25	1.25	30.00	28.50	26.25	2.25	31.00	1.00	32		120	290
28	35.00	1.25	1.38	32.00	30.50	28.25	2.25	33.00	1.00	36		140	360
30	37.00	1.25	1.38	34.00	32.50	30.25	2.25	35.00	1.00	36		150	405
32	39.50	1.25	1.50	36.25	34.63	32.25	2.50	37.38	1.13	40		170	500
34	41.50	1.25	1.63	38.25	36.63	34.25	2.50	39.38	1.13	40		180	600
36	43.50	1.25	1.63	40.25	38.63	36.25	2.50	41.38	1.13	44		190	660
42	50.00	1.25	1.88	46.50	44.75	42.25	2.75	47.75	1.25	48		235	1000
48	56.00	1.25	2.13	52.50	50.75	48.25	2.88	53.75	1.25	56		270	1450
54	62.50	1.38	2.38	59.00	57.25	54.25	3.13	60.25	1.25	68		335	2000
60	68.50	1.63	2.63	65.00	63.25	60.25	3.63	66.25	1.25	72		450	2675
66	75.50	1.75	2.88	71.63	69.50	66.25	4.00	73.00	1.38	72		590	3550
72	81.50	2.00	3.13	77.63	75.50	72.25	4.50	79.00	1.38	80		730	4500

Dimensions are in inches.